




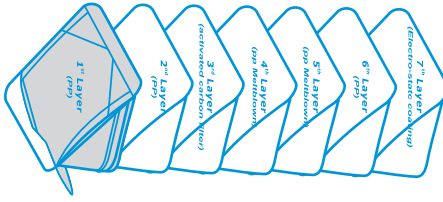



<div data-bbox="1009 120 1295 797">  <p>safe to breathe</p>  <p>NT-V MASK</p> <p>U.S. Pat.Pend. 11/437,788</p> <p>www.champak.com.tw</p> </div>			<div data-bbox="934 1912 956 2101"> Instructions for use </div> <ol style="list-style-type: none"> 1. Not for use in atmospheres containing less than 19.5 percent oxygen. 2. Not for use in atmospheres immediately dangerous to life or health. 3. Do not exceed maximum use concentrations established by regulatory standards. 4. Failure to properly use and maintain this product could result in injury or death. 5. All approved respirators shall be selected, fitted, used, and maintained in accordance with MSHA, OSHA, and other applicable regulations. 6. Never clean, modify, add, or remove parts. Use only exact replacement parts in the configuration as specified by the manufacturer. 7. Refer to User's Instructions, and/or maintenance manuals for information on use and maintenance of these respirators. 8. NIOSH does not evaluate respirators for use as surgical masks. 9. This mask must not be used for more than 8 hours (working shift). Always replace the mask if the seal becomes loose, the filter resistance becomes excessive or at the end of every working shift. 10. No alteration or modification is allowed. Never use damaged masks, in-liner cases, or expired filter canisters. 11. The wearer of the mask must be well trained to use properly before starting work. Facial hair (beard or sideburns) of the user within the area of the sealing edges of the mask may jeopardize the protection efficacy of the mask seal. <div data-bbox="454 1912 504 2190">  <p>Lot : XXXX</p> </div>
<div data-bbox="439 120 962 797">  <p>NT-V MASK</p> <p>U.S. Pat.Pend. 11/437,788</p> <p>www.champak.com.tw</p> <div data-bbox="768 156 796 264"> Warning </div> <ol style="list-style-type: none"> 1. Do not use the mask as protection against toxic particles, gases or vapors, solvents from spray-painting operations, or in explosive atmospheres. 2. This mask should not be worn when conditions prevent a good face to face piece seal. Such conditions include: facial hair, beard, or sideburns; use of "beard" devices containing temples or straps which pass between the mask sealing edge and the wearer's face. 3. Leave the work area immediately if breathing becomes difficult or dizziness or any other signs of distress occur. 4. The instruction for use and warning is helpful for correct using of the product and to prevent risks of health. It is compulsory to read it carefully and to follow it. <div data-bbox="567 156 592 371"> Storage and Shelf life </div> <p>The shelf life of the mask is 3 years and the mask should be placed in a container and store in a clean cool and dry atmosphere to ensure that it is protected against dust, chemicals, moisture, excessive heat and direct sunlight.</p> <div data-bbox="439 147 482 282"> - Easy breathing - Long duration </div> </div>	<div data-bbox="508 846 943 1133"> Instruction for fitting: <ol style="list-style-type: none"> 1. Fold the mask to create centerline 2. Take the mask and gently extend the sides and top to fit around the face from two sides to open the mask. 3. Position the mask under the chin with nose-piece facing upwards. 4. Press the lower headstrap over the head and press it on the back of the head, position the upper headstrap around the head above ears. 5. Expand the mask up and down to cover the nose and chin. Mould the mask to the shape of nose and chin the correct fit. <p>Patent Pending: 11/437,788</p> <p>x 30pcs</p> </div>	<div data-bbox="429 1182 962 1859">  <p>NT-V MASK</p> <p>U.S. Pat.Pend. 11/437,788</p> <p>www.champak.com.tw</p>  <div data-bbox="501 1554 699 1845">  <p>NIOSH</p> <p>National Institute for Occupational Safety and Health U.S. Department of Health and Human Services</p> <p>Product of: Champak enterprise co., Ltd No 27-1, Jhuangjing St.Dasi, Taoyuan, 335, Taiwan www.champak.com.tw +886-3-3808818 +886-3-3807103</p> </div> </div>	